


TALO.S HEALTHY WORKING HEALTHY LIVING


DIMPLED DESK SCREEN, FELT
With flexible
organiser elements

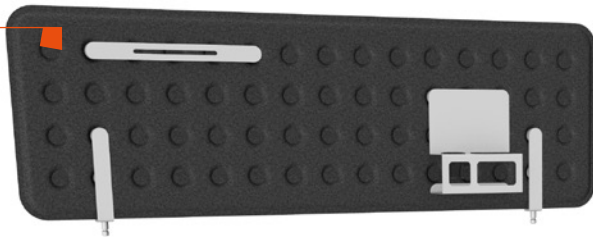


**FABRIC-COVERED
DESK SCREEN**
For desks with integral
adaptors
Screen thickness 25 mm
and 50 mm absorber
class A (on one side)

**FABRIC-COVERED DESK
SCREEN WITH
ORGANISER RAIL**
For sturdy mounting of
flat screen monitor
brackets or shelves
Screen thickness 25 mm

ORGANISER RAIL
For sturdy mounting of
flat screen monitor
brackets or shelves

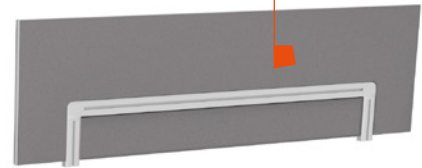

MODESTY PANEL, METAL
Retrofittable

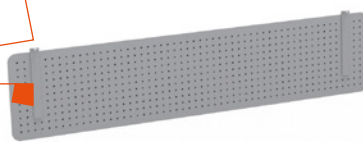

**ADAPTER WITH INTEGRAL
CABLE MANAGEMENT**
For retrofitting a third level




DESKTOP ELECTRICS
With adhesive fastening
or clip-on

**"PUSH-TO-OPEN"
CABLE COVER**
For direct access to
data and power



**SPACIOUS CABLE TRAY
IN TWO HEIGHTS**



**CPU BRACKET,
METAL**
Can be fitted
inside or
outside the
frame



PRINTER TRAY

**CABLE DUCT WITH
CABLE CHAIN**
For vertical wire
management of
motorised desks



**SMOOTH-RUNNING
SLIDING TOP**

CABLE CHAIN

CABLE TRIMS
For vertical wire
management of lift
and motorised desks

TALO.S AS A TEAM WORKSTATION

FABRIC-COVERED CENTRAL PANEL

FABRIC-COVERED DESK SCREEN WITH INTEGRAL TOOL RAIL
For bench systems with integral adaptors

ORGANISER RAIL
For sturdy mounting of flat screen monitor brackets or shelves

CABLE CHAIN

SIDE TRIM
Perforated

SIDE TRIM
Non-perforated

CENTRAL CABLE TRAY
Beneath desk top

ELECTRICS CUT-OUT
With brush seal and tool-rail to hold flat screen monitors

CLAMP-ON SIDE PANEL
For visual screening

SMOOTH-RUNNING SLIDING TOP
Free access to cables from above

CABLE TRAY
Beneath desk top

HEIGHT ADJUSTMENT OPTIONS



Handwheel
Manual tool-free height adjustment in increments from 650 to 850 mm





Adjustable gas lift
Fast height-adjustment, no power source required, from 680 to 1180 mm for:
+ 20 kg (+/- 10 kg) or
+ 40 kg (+/- 10 kg) useful load
+ with a useful load pre-set of max. 50 kg



Motorised
Convenient, infinitely-variable adjustment from 650 to 1250 mm or 680 to 1180 mm with integral collision prevention

TALO.S INFOCARD

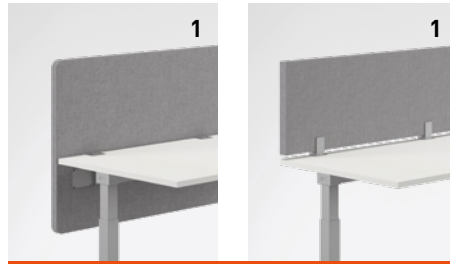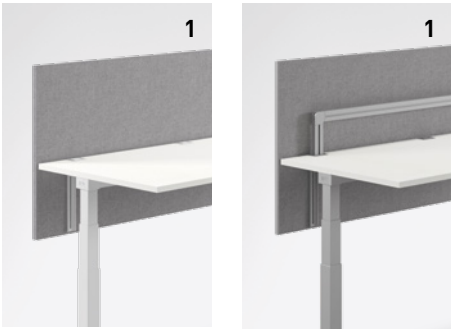

FURTHER OPTION:

Hygiene screens

Can also be used / retrofitted on TALO.S

1 | FABRIC-COVERED DESK SCREENS

Provide visual privacy at the workstation with optional railing or tool rail.



2



3

Standard

3

2 | CABLE DUCT WITH CABLE CHAIN


Houses vertical electrics for motorised and lift desks.

3 | OPERATING CONSOLE


In two variants for motorised height adjustment.

4 | ELECTRICS CUT-OUT

With brush seal and tool rail to hold flat screen monitors. Also suitable for bench systems.

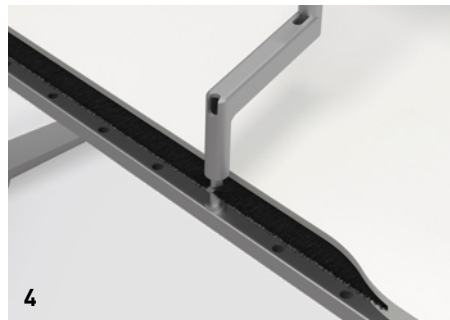

4

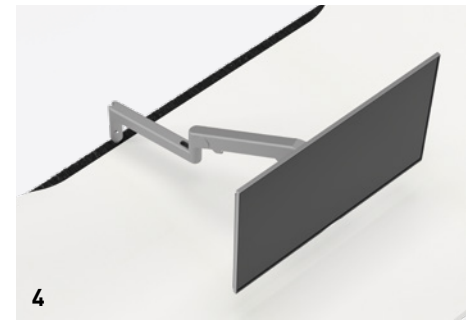

4



5

5 | CABLE TRAY IS HINGED AT BOTH SIDES


On standard desks without sliding top.

6 | CLEAR LACQUER LEG FRAME FINISH

With visible weld points.



6

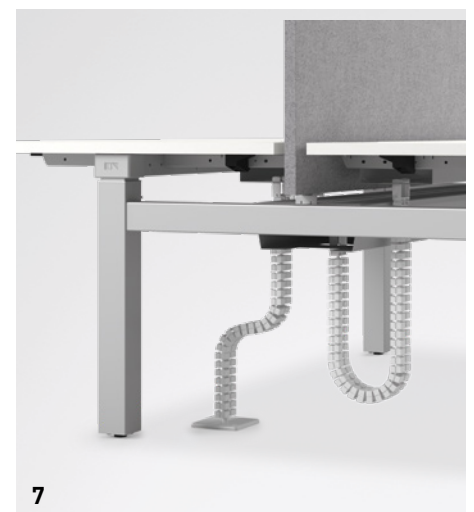

7

7 | FLEXIBLE CABLE MANAGEMENT

Electrics pass through umbilicals to the central cable tray and down to the floor.

Height adjustments

Height-adjustable
650 to 850 mm

Single desk

Bench



Gas lift
+ 680 to 1180 mm with adjustable useful load from 0 to max. 50 kg
(depending on desk size)
+ 680 to 1180 mm for 20/40 kg useful load (+/- 10 kg)



Electric motor, double telescopic action
Adjustable in height: 650 to 1250 mm/680 to 1180 mm



Wire management

Electrics cut-out with brush seal and tool rail



Cut-outs/adapters



Sliding top



Clip-down cable tray, opens both sides



Cable flap with four-gang socket



Accessories

Railing



Desk screens



Fly-by screens



■ Standard □ Optional